



BEAUTY & SPEED:

- FAST & SIMPLE INSTALLATION - Prefabricated modular panels allow the installation team to quickly complete jobs
- MULTIPLE STYLES - Plank, 3D Cube, 3D Stick, Chevron, Slats, and Board & Batten.
- CUSTOM CAPABILITIES - Our in-house craftspeople and state of the art equipment will bring your vision to life

Create spaces of unsurpassed beauty and character with TerraMai Modular Panels; reclaimed and sustainable wood on an FSC-certified plywood backer. Installation is quick, easy, and stays true to your design intent. Our modular panels will dramatically reduce your installation time for faster project completion.

Table 1: Approved Applications

Application Area	INTERIOR			EXTERIOR		
	Floors	Walls	Ceilings	Siding	Decking	Soffits
Application Area	No	Yes	Yes	No	No	No
Installation Method	N/A	1. Glue & Nail following Modular Panel Installation Guidelines 2. Z Clips	1. Glue & Nail to 1/2" or thicker plywood 2. Approved mechanical fasteners connecting to structural members	N/A	N/A	N/A


Always consult a professional engineer to ensure compliance with all local building codes.

Acclimation

TerraMai Modular Panels are constructed of natural, reclaimed wood assembled on 1/2" thick birch plywood. The panels should be stored in a clean, dry, controlled environment between 60°F (16°C) and 80°F (27°C) and 30% to 50% RH, until the wood moisture content has achieved equilibrium.

Custom

- Panel sizes and shapes
- Wood species
- Slat sizing and angle
- Finishes
- Trim
 - Edge
 - Baseboard
 - Quarter Round
 - Door & Window

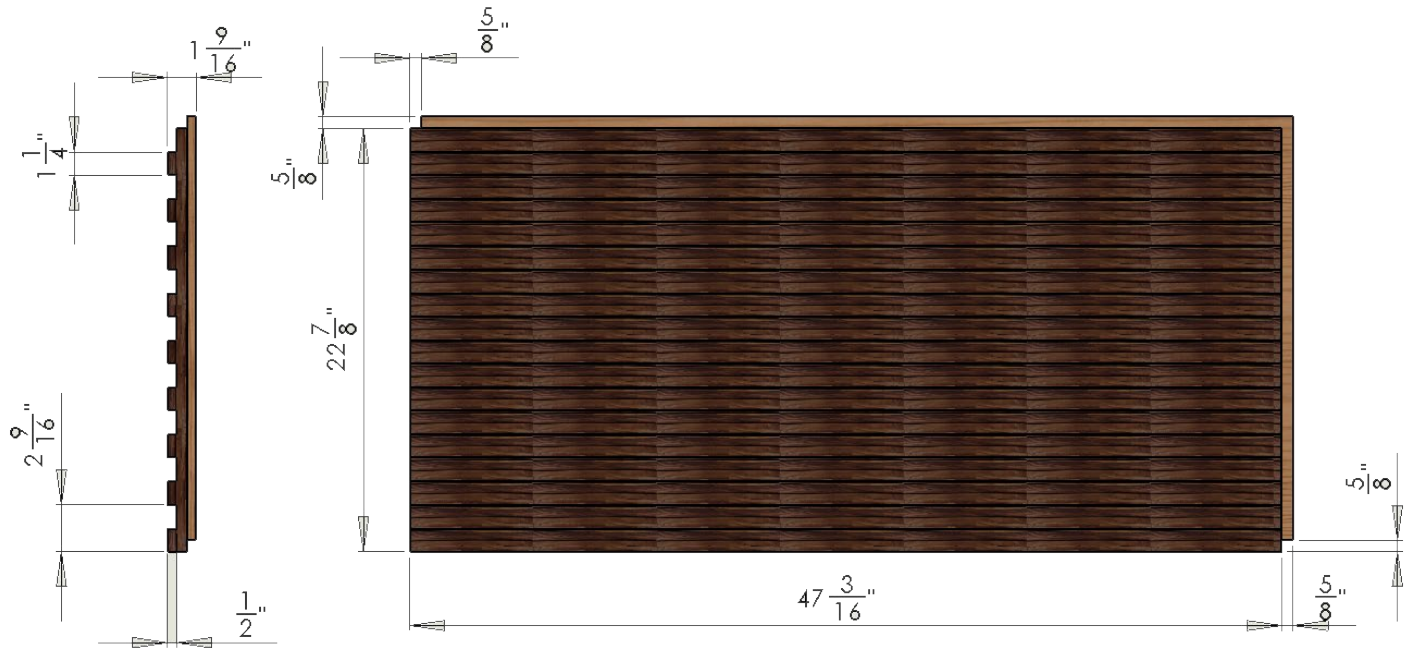

Acacia Metro

Weight		
Total panel Weight	Pounds	38
	Kilograms	17
Weight per Area	Pounds per Square Foot	2.6
	Kilograms per Square Meter	13
Sustainability		
FSC® % Mix	FSC-C021798	69%
Reclaimed Content by Type	By Volume	31% Pre-Consumer
Source	Acacia reclaimed from pre-consumer manufacturing fall-down in Southeast Asia.	
LEED v4 Contribution	EQ Credit - Low-Emitting Materials	Yes
	MR Credit - Recycled Content	No

The colors are not representative of the color of the wood.

Wood is a natural material, and color and grain patterns will vary from piece to piece.

Visit [TerraMai.com](https://www.terramai.com) for information on Modular Panels Installation Instructions and other modular panel configuration options.



SKU

Species	Prefinished*
Acacia Metro	1084

** Oil or Polyurethane to be specified on order. Custom finishes are available.

Available Species*	Acacia Metro
Finish Options*	Zero-VOC clear oil or low-VOC polyurethane
Panel Thickness*	1-9/16" (40mm)
Width*	22-7/8" (581mm)
Lengths*	47-3/16" (1199mm)
Construction*	1-1/4" wide x 1/2" deep battens spaced 2-9/16" OC on metro-style engineered planks installed on 1/2" FSC Certified plywood
Plywood	1/2" FSC Certified 5-ply Birch plywood
Moisture Contentv	6-8%
Packaging	Crated
Installation on Walls	Glue & nail or Z-Clip
Ceiling Installation**	Approved mechanical fasteners attaching to structural members
Samples*	7-5/8" x 7-7/8" in Acacia Metro

*Custom finishes, sizes and species available.

** Consult engineer with working knowledge of local building codes.

CERTIFICATIONS



FSC Mix 69% – FSC-C021798

CONTRIBUTES TO LEED® V4.1

Responsible Sourcing of Raw Materials
(1-2 points)

Low-Emitting Materials
(Possible 3 Points)