



TerraMai's Mixed Grain Doug Fir Flooring & Paneling, reclaimed from post-industrial fall down from throughout the Pacific Northwest, has classic American good looks. Clear vertical grain (CVG) also available.

Allowed Application Areas

INTERIOR			EXTERIOR	
Floors	Walls	Ceilings	Siding	Decking
Yes*	Yes	Yes	No	No

Approved Installation Methods

- Nail/Staple/Cleat
- Glue & Nail (100% moisture-curing polyurethane or silane-modified polymer - AXIOS or MS-Polymer)

Acclimation

The planks should be stored in a clean, dry, controlled environment between 60°F (16°C) and 80°F (27°C) and 35% to 55% RH, until the wood has achieved equilibrium moisture content. See the [TerraMai Flooring/Paneling Acclimation Instructions](#) for further information.

Options

Class A Flame Retardant

Profile

S4S - T&G, Square Edge, Back Relieved



*Note on Flooring Applications: Doug Fir is on the softer end of the scale compared to most other woods. As such, it will more easily develop a patina of use evidenced in heel marks and other indentations. To many, this is the warmth and organic nature they expect to see in a wood floor. In a lower impact residential use, such wear is typically less noticeable than in a high traffic commercial space. In a high traffic commercial space, you may decide that one of our harder woods is more suitable. Assuming you do select this Doug Fir for flooring, you may choose to have TerraMai finish the material in an oil rather than a polyurethane (wear is then somewhat less noticeable).

TERRAMAI

DOUGLAS FIR
SOLID
FLOORING & PANELING


Wood is a natural material. Variation in color and grain pattern are to be expected.
For more information or to place an order, please contact your [local TerraMai Rep.](#)



SKU	212
Finish Option	Unfinished
Face Width	5" (127mm)



SKU	808
Finish Option	Mocha
Face Width	5" (127mm)

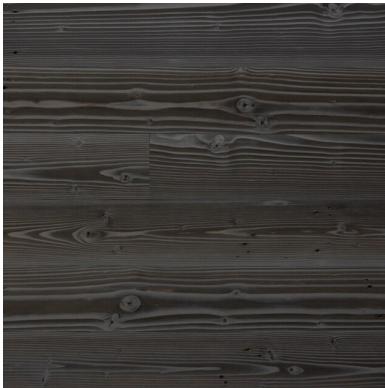

SKU	836
Finish Option	Faux Sugi Ban®*
Face Width	5" (127mm)

*This finish may not be used for flooring applications.

Species	<i>Pseudotsuga menziesii</i>
Source	Post-industrial fall down reclaimed from throughout the Pacific Northwest.
Recycled Content	100% Pre-Consumer
Character	Mixed grain with nail and other fastener holes, surface seasoning checks, tight, loose and missing knots along with other signs of prior history and age.
Finish*	Zero-VOC clear oil, low-VOC polyurethane, or unfinished
Thickness	5/8" (16mm)
Width	5" (127mm)
Lengths	2' - 12' (610mm - 3,658mm)
Construction	Solid
Wear Layer	1/4" (6mm)
# of Backer Plies	N/A
Filler	No
Janka/Hardness	620 lbs (2.8 kN)
Moisture Content	6%-9%
Knots	Tight, loose, and missing knots of all sizes.
Nail Holes	No
Saw Marks	No
Grain	Mixed Grain
Density	32 lbs/ft ³ (512.6 kg/m ³)
Packaging	Palletized

*Custom finishes available.

For more information on installation guidelines, please visit TerraMai.com and see [Flooring Installation Instructions](#) or [Paneling Installation Instructions](#).

CERTIFICATIONS



HPD Certified



VOC Reduction - Feature 4
Toxic Material Reduction - Feature 25

CONTRIBUTES TO TO LEED® V4

EQ Credit: Low-Emitting Materials - Flooring
(1-3 Points)