



Beautifully weathered redwood siding that has the classic, naturally distressed redwood patina associated with the Northern California coast.

**Table 1 - Approved Applications**

	INTERIOR			EXTERIOR		
	Floors	Walls	Ceilings	Decking	Siding	Soffits
<b>Application Area</b>	No	Yes	Yes	No	Yes	Yes
<b>Installation Method</b>	N/A	1. Nails into structural members 2. Nail & Glue	1. Nails into structural members 2. Nail & Glue	N/A	1. Nails*	1. Nails*

\* See Siding Installation Guidelines for requirements.





### Acclimation

Wood siding must be allowed time to reach its equilibrium moisture content with the location where it will be installed. Upon receiving your material, remove the siding from the packaging and visually inspect boards for defects, including boards from the top, bottom and middle. Cross-stack the material with stickers (spacers between each layer) to allow air circulation on all sides of all boards. Stickers must be a maximum of 12" apart to prevent the siding from warping. Make sure to place in an area where there will be good air flow through the stack. The stack must be protected at all times from direct sunlight and liquid water, including irrigation systems, all forms of precipitation, and dew formation. Follow all requirements in the Siding & Decking Acclimation Guidelines that can be found at [Terramai.com/acclimation](https://Terramai.com/acclimation).

### Custom

- Trim
- Board thickness
- Board widths
- Reveal widths
- Finishes

Table 2 - Profiles


Profile	Beveled Lap	Board & Batten	Rainscreen	Shiplap
				
<b>Installation Orientation Options</b>	Horizontal or Vertical	Vertical Only	Horizontal or Vertical	Horizontal or Vertical
<b>Milling</b>	Surfaced three sides (S3S) with as-is weathered face. Beveled Lap profile with 1/4" reveal. Unfilled.	Surfaced three sides (S3S) with as-is weathered face with square edge profile. Unfilled.	Surfaced three sides (S3S) with as-is weathered face with rainscreen profile, 3/16" reveal. Unfilled.	Surfaced three sides (S3S) with as-is weathered face. Shiplap profile with 1/4" reveal. Unfilled.
<b>Width</b>	6-3/4"	8" Center to Center (7" Boards spaced 1" apart, gap covered by 3-1/2" Battens)	6-3/4"	7"
<b>Reveal (Included in Width)</b>	1/4"	1" (Covered by Battens)	3/16"	1/4"
<b>Thickness</b>	5/8"	1-1/4" Total (5/8" Boards + 5/8" Battens)	11/16"	5/8"

Wood is a natural material. Variation in color and grain pattern are to be expected.

For more information or to place an order, please contact your [local TerraMai Rep.](#)




Lost Coast Redwood - Clear Protective Sealer



Lost Coast Redwood - Fog





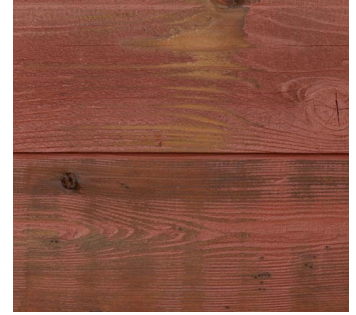

Lost Coast Redwood - Faux Sugi Ban®



Lost Coast Redwood - Burnished Red

**Table 3 - SKU & Finish Data**

	FINISH	SKU
<b>Beveled Lap</b> 	Unfinished	1533
	Clear Protective Sealer	1534
<b>Board &amp; Batten</b> 	Unfinished	1535
	Clear Protective Sealer	1536
<b>Rainscreen</b> 	Unfinished	1537
	Clear Protective Sealer	1538
<b>Shiplap</b> 	Unfinished	583
	Clear Protective Sealer	590
	Faux Sugi Ban	840
	Fog	749
	Burnished Red	869

Species	<i>Sequoia sempervirens</i>
Source	Reclaimed Redwood from aging structures in the San Francisco Bay Area.
Character	Heavy to light weathering. Occasional unfilled fastener, insect or other through holes. Tight knots up to 3" wide with some missing knots. Seasoning checks and end-splits not to exceed 4". Possible oxide and other staining, along with other evidence of prior use and history.
Finish*	Clear Protective Sealer, Faux Sugi Ban, Fog, or Burnished Red.
Thickness	Varies by Profile. See Table 2 - Profiles
Width	Varies by Profile. See Table 2 - Profiles
Lengths	2' - 5'-6" (610mm - 1676mm) random lengths.
Construction	Solid
# of Backer Plies	N/A
Filler	N/A
Janka/Hardness	450 lbs (2 kN)
Moisture Content	12% - 16%
Knots	Tight knots up to 1-1/2" with some missing knots, seasoning checks, and end splits not to exceed 4". Possible oxide and other staining.
Nail Holes	Yes
Saw Marks	Yes
Grain	Mixed Grain
Density	26 lbs/ft <sup>3</sup> (704.8 kg/m <sup>3</sup> )
Packaging	Palletized

\*Custom finishes available.

For more information on installation guidelines, please visit [TerraMai.com](https://TerraMai.com) and see [Siding Installation Guidelines](#).

## CERTIFICATIONS



FSC Recycled 100% - FSC-C021798



[HPD v2.1.1](#)

## CONTRIBUTES TO LEED® V4

EQ Credit: Low-Emitting Materials  
(1-3 Points)

MR Credit: Building Life-Cycle Impact Reduction, Option 3  
(2-5 Points)