



TerraMai’s MC White Oak Flooring & Paneling, with its rift & quartered wear layer, offers a reclaimed product with an ultra-clean, consistent look.

**Table 1: Approved Applications**

|                     | INTERIOR   |  |  | EXTERIOR |         |         |
|---------------------|--|--|--|----------|---------|---------|
|                     | Floors   | Walls  | Ceilings   | Siding   | Decking | Soffits |
| Application Area    | Yes  | Yes  | Yes  | No       | No      | No      |
| Installation Method | <ol style="list-style-type: none"> <li>1. Nails/Staples/Cleats</li> <li>2. Glue &amp; Nail (100% moisture-curing polyurethane or silane-modified polymer - AXIOS or MS-Polymer)</li> <li>3. Glue (100% moisture-curing polyurethane or silane-modified polymer - AXIOS or MS-Polymer)</li> </ol> | <ol style="list-style-type: none"> <li>1. Nails/Staples/Cleats to ½” minimum plywood</li> <li>2. Glue &amp; Nail (100% moisture-curing polyurethane or silane-modified polymer - AXIOS or MS-Polymer)</li> </ol> | <ol style="list-style-type: none"> <li>1. Nails/Staples/Cleats to ½” minimum plywood</li> <li>2. Glue &amp; Nail (100% moisture-curing polyurethane or silane-modified polymer - AXIOS or MS-Polymer)</li> </ol> | N/A      | N/A     | N/A     |

**Acclimation**

The planks should be stored in a clean, dry, controlled environment between 60°F (16°C) and 80°F (27°C) and 30% to 50% RH, until the wood has achieved equilibrium moisture content. See the [TerraMai Flooring/Paneling Acclimation Guidelines](#) for further information.

## Options

- Class A Flame Retardant
- Trim:
  - Stair Nosing
  - Edge Trim
  - Quarter Round
  - Corner Trim
  - Baseboard
  - Transition Strips
  - Door & Window Trim

## Profile

T&G, Micro Bevel Edge, End Matched



Wood is a natural material. Variation in color and grain pattern are to be expected.  
For more information or to place an order, please contact your [local TerraMai Rep.](#)



|               |           |
|---------------|-----------|
| SKU           | 369       |
| Finish Option | Clear Oil |


|               |      |
|---------------|------|
| SKU           | 757  |
| Finish Option | Poly |



|               |          |
|---------------|----------|
| SKU           | 859      |
| Finish Option | Pale Ale |



|               |        |
|---------------|--------|
| SKU           | 2214   |
| Finish Option | Saddle |

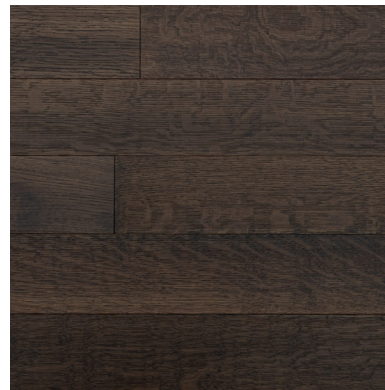

|               |          |
|---------------|----------|
| SKU           | 2216     |
| Finish Option | Espresso |

|                   |  |
|-------------------|--|
| Species           | <i>Quercus alba</i>  |
| Source            | Wear layer reclaimed from pre-consumer industrial fall-down in the Midwestern United States on FSC® Certified new wood core. |
| Character         | Clear rift & quartered linear grain with occasional ray fleck.   |
| Finish*           | Zero-VOC clear oil, low-VOC polyurethane, or unfinished  |
| Thickness         | 9/16" (14mm)   |
| Width             | 5" (127mm)   |
| Lengths           | 1' - 7' (305mm - 2133mm)   |
| Construction      | Wear layer at 1/8" (3 mm) thick over an FSC® certified new wood substrate. Three-ply, single-strip construction.             |
| Wear Layer        | 1/8" (3mm)   |
| # of Backer Plies | 3  |
| Filler            | N/A  |
| Janka/Hardness    | 1,350 lbs (6 kN)   |
| Moisture Content  | 6%-9%  |
| Knots             | Very occasional small and sound tight knots  |
| Nail Holes        | No   |
| Saw Marks         | No   |
| Grain             | Rift & Quartered Vertical Grain  |
| Density           | 47 lbs/ft <sup>3</sup> (752.9 kg/m <sup>3</sup> )  |
| Packaging         | Boxed, 17.5 square feet per box  |
| Reclaimed Content | 22% Pre-Consumer   |

\*Custom finishes available.

For more information on installation guidelines, please visit [TerraMai.com](https://www.terramai.com) and see [Flooring Installation Guidelines](#) or [Paneling Installation Guidelines](#).

## CERTIFICATIONS



FSC Mix 76% - FSC-C021798



FloorScore® -SCS-FS-03865



VOC Reduction - Feature 4  
Toxic Material Reduction - Feature 25

## CONTRIBUTES TO LEED® V4

EQ Credit: Low-Emitting Materials - Flooring  
(1-3 Points)