

There is a reason the world’s navies have prized teak decks for centuries. From the blistering sun of the tropics to the frigid temperatures of the arctic, teak is equal to the challenge. New, plantation-grown teak from Central America simply cannot compare to reclaimed Asian teak, in either looks or durability.

Table 1 - Approved Applications

	INTERIOR			EXTERIOR		
	Floors	Walls	Ceilings	Decking	Siding	Soffits
Application Area	Yes	Yes	Yes	Yes	Yes**	Yes**
Installation Method	1. Hidden Clips	1. Hidden Clips*	1. Hidden Clips*	1. Hidden Clips	1. Hidden Clips*	1. Hidden Clips*

* If approved in writing by the clip manufacturer.

** There must be adequate airflow behind the decking, and fasteners spacing must not be greater than 24”.


Acclimation


Wood decking must be allowed time to reach its equilibrium moisture content with the location where it will be installed. Upon receiving your material, remove the decking from the packaging and visually inspect boards for defects, including boards from the top, bottom and middle. Cross-stack the material with stickers (spacers between each layer) to allow air circulation on all sides of all boards. Stickers must be a maximum of 12” apart to prevent the decking from warping. Make sure to place in an area where there will be good air flow through the stack. The stack must be protected at all times from direct sunlight and liquid water, including irrigation systems, all forms of precipitation, and dew formation. Follow all requirements in the Siding & Decking Acclimation Guidelines that can be found at Terramai.com/acclimation.

Custom

- Trim
- Board thickness
- Board widths
- Reveal widths
- Finishes

Table 2 - Profiles

Profile	Hidden Clip 
Milling	Surfaced four sides (S4S) with 5/32" height x 1/2" deep groove for clip system. Eased four edges (E4E) at 1/8" radius.
Width	5"
Thickness	7/8"

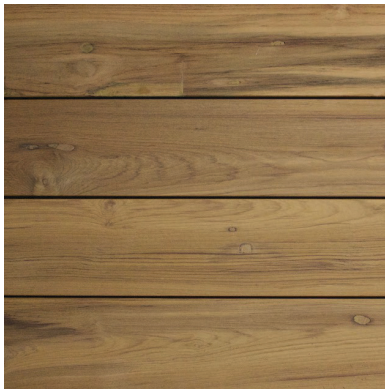

Wood is a natural material. Variation in color and grain pattern are to be expected. For more information or to place an order, please contact your [local TerraMai Rep.](#)

Table 3 - SKU Finish Data

	FINISH	SKU
Hidden Clip 	Unfinished	364
	Clear Protective Sealer	803
	Color Protecting Exterior Finish	1227

Species	<i>Tectona grandis</i>
Source	Reclaimed from vintage structures in Southeast Asia.
Character	Prefilled nail and other holes, oxide stains, prefilled surface seasoning checks and occasional sound tight knots.
Finish*	Clear Protective Sealer or Color Protecting Exterior Finish
Thickness	7/8" (22mm)
Width	5" (127mm)
Lengths	6' - 12' (1829mm - 3658mm)
Construction	Solid
# of Backer Plies	N/A
Filler	Through holes (including mortise pockets) prefilled with Teak and/or black epoxy (best face only)
Janka/Hardness	1,070 lbs (4.7 kN)
Moisture Content	12% - 16%
Knots	Occasional sound tight knots.
Nail Holes	Prefilled with Teak and/or black epoxy.
Saw Marks	No
Grain	Mixed Grain
Density	41 lbs/ft ³ (655 kg/m ³)
Packaging	Palletized

*Custom finishes available.

For more information on installation guidelines, please visit TerraMai.com and see [Decking Installation Guidelines](#).

CERTIFICATIONS



FSC Recycled 100% - FSC-C02179



[HPD v2.1.1](#)

CONTRIBUTES TO LEED® V4

EQ Credit: Low-Emitting Materials - Flooring
(1-3 Points)

MR Credit: Building Life-Cycle Impact Reduction, Option 3
(2-5 Points)