

TerraMai's Western Red Cedar thin paneling can elevate any project on beauty alone but its many benefits will make you feel like a design hero. Thin paneling conserves material while still gaining Western Red Cedar's lasting beauty and durability. The wood is free of resin and pitch therefore it takes finishes exceptionally well. Also available as siding.

Allowed Application Areas

INTERIOR			EXTERIOR	
Floors	Walls	Ceilings	Siding	Decking
No	Yes	Yes	No	No

Approved Installation Methods

- Nail/Staple/Cleat
- Glue & Nail (100% moisture-curing polyurethane or silane-modified polymer - AXIOS or MS-Polymer)

Acclimation

The planks should be stored in a clean, dry, controlled environment between 60°F (16°C) and 80°F (27°C) and 35% to 55% RH, until the wood has achieved equilibrium moisture content. See the [TerraMai Flooring/Paneling Acclimation Instructions](#) for further information.

Options

Class A Flame Retardant

Profile


S4S - T&G, Square Edge




TERRAMAI

WESTERN RED CEDAR
SOLID
PANELING

Wood is a natural material. Variation in color and grain pattern are to be expected.
For more information or to place an order, please contact your [local TerraMai Rep.](#)

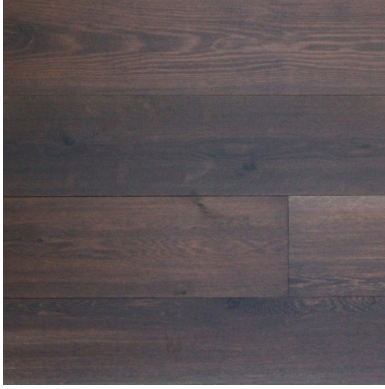

SKU	736
Finish Option	Dark Oil
Face Width	5" (127mm)

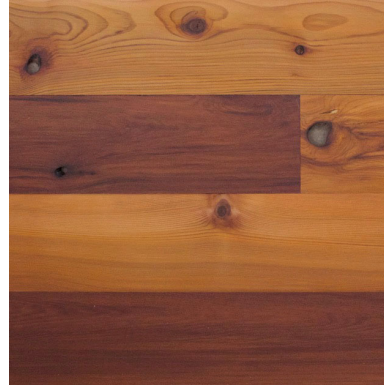

SKU	1015
Finish Option	Clear Oil
Face Width	5" (127mm)

Species	<i>Thuja plicata</i>
Source	Reclaimed cedar from Vancouver Island consisting of standing dead trees and found logs abandoned from forestry practices
Character	Includes sound, tight and missing knots of all sizes, along with occasional surface seasoning checks.
Finish*	Zero-VOC clear oil, low-VOC polyurethane, or unfinished
Thickness	3/8" (10mm)
Width	5" (127mm)
Lengths	1' - 8' (305mm - 2,438mm)
Construction	Solid
Wear Layer	1/8" (3mm)
# of Backer Plies	N/A
Filler	No
Janka/Hardness	350 lbs (1.6 kN)
Moisture Content	6%-9%
Knots	Tight and missing knots, and occasional surface seasoning checks
Nail Holes	No
Saw Marks	No
Grain	Mixed Grain
Density	23 lbs/ft ³ (368.4 kg/m ³)
Packaging	Palletized

*Custom finishes available.

For more information on installation guidelines, please visit [TerraMai.com](https://www.terramai.com) and see [Flooring Installation Instructions](#) or [Paneling Installation Instructions](#).

CERTIFICATIONS



HPD Certified

CONTRIBUTES TO TO LEED® V4

EQ Credit: Low-Emitting Materials - Flooring
(1-3 Points)